


CUSTOMER SERVICE SIGN NOTES


- 1) CUSTOMER SERVICE LETTERING TO BE .5" MDF WITH 040" BRUSHED ALUMINUM DF-1 APPLIED TO FACE. ALL OTHER SURFACES OF DEPARTMENT LETTERING TO BE PAINTED M-2. LETTERING FONT TO BE CORBEL TRUETYPE. (SEE SHEET ID5.13B FOR DETAILS)
- 2) CABINET SHEETING TO BE .063" ALUMINUM 5052-H32 WITH PL-1 LAMINATE.
- 3) CABINET FRAMEWORK TO BE CONSTRUCTED OF .063 WALL 1" SQ. TUBE ALUMINUM 6061-T6 MEMBERS. FRONIUS TRANSPULSE SYNERGIC WELDING TO BE PERFORMED BY AWS CERTIFIED WELDERS, RADIUS MEMBERS SHALL BE FORMED BY COMPUTERIZED ROTARY DRAW TUBE EQUIPMENT TO ENSURE ARC INTEGRITY. FRAMEWORK TO BE MILL FINISH.
- 4) STEEL WIRE ROPE, CABLE LOCK AND WIRE EYE BOLT HANGING SYSTEM, BOLT INTO STEEL TUBE FRAME, SUSPENDED FROM STRUCTURE ABOVE

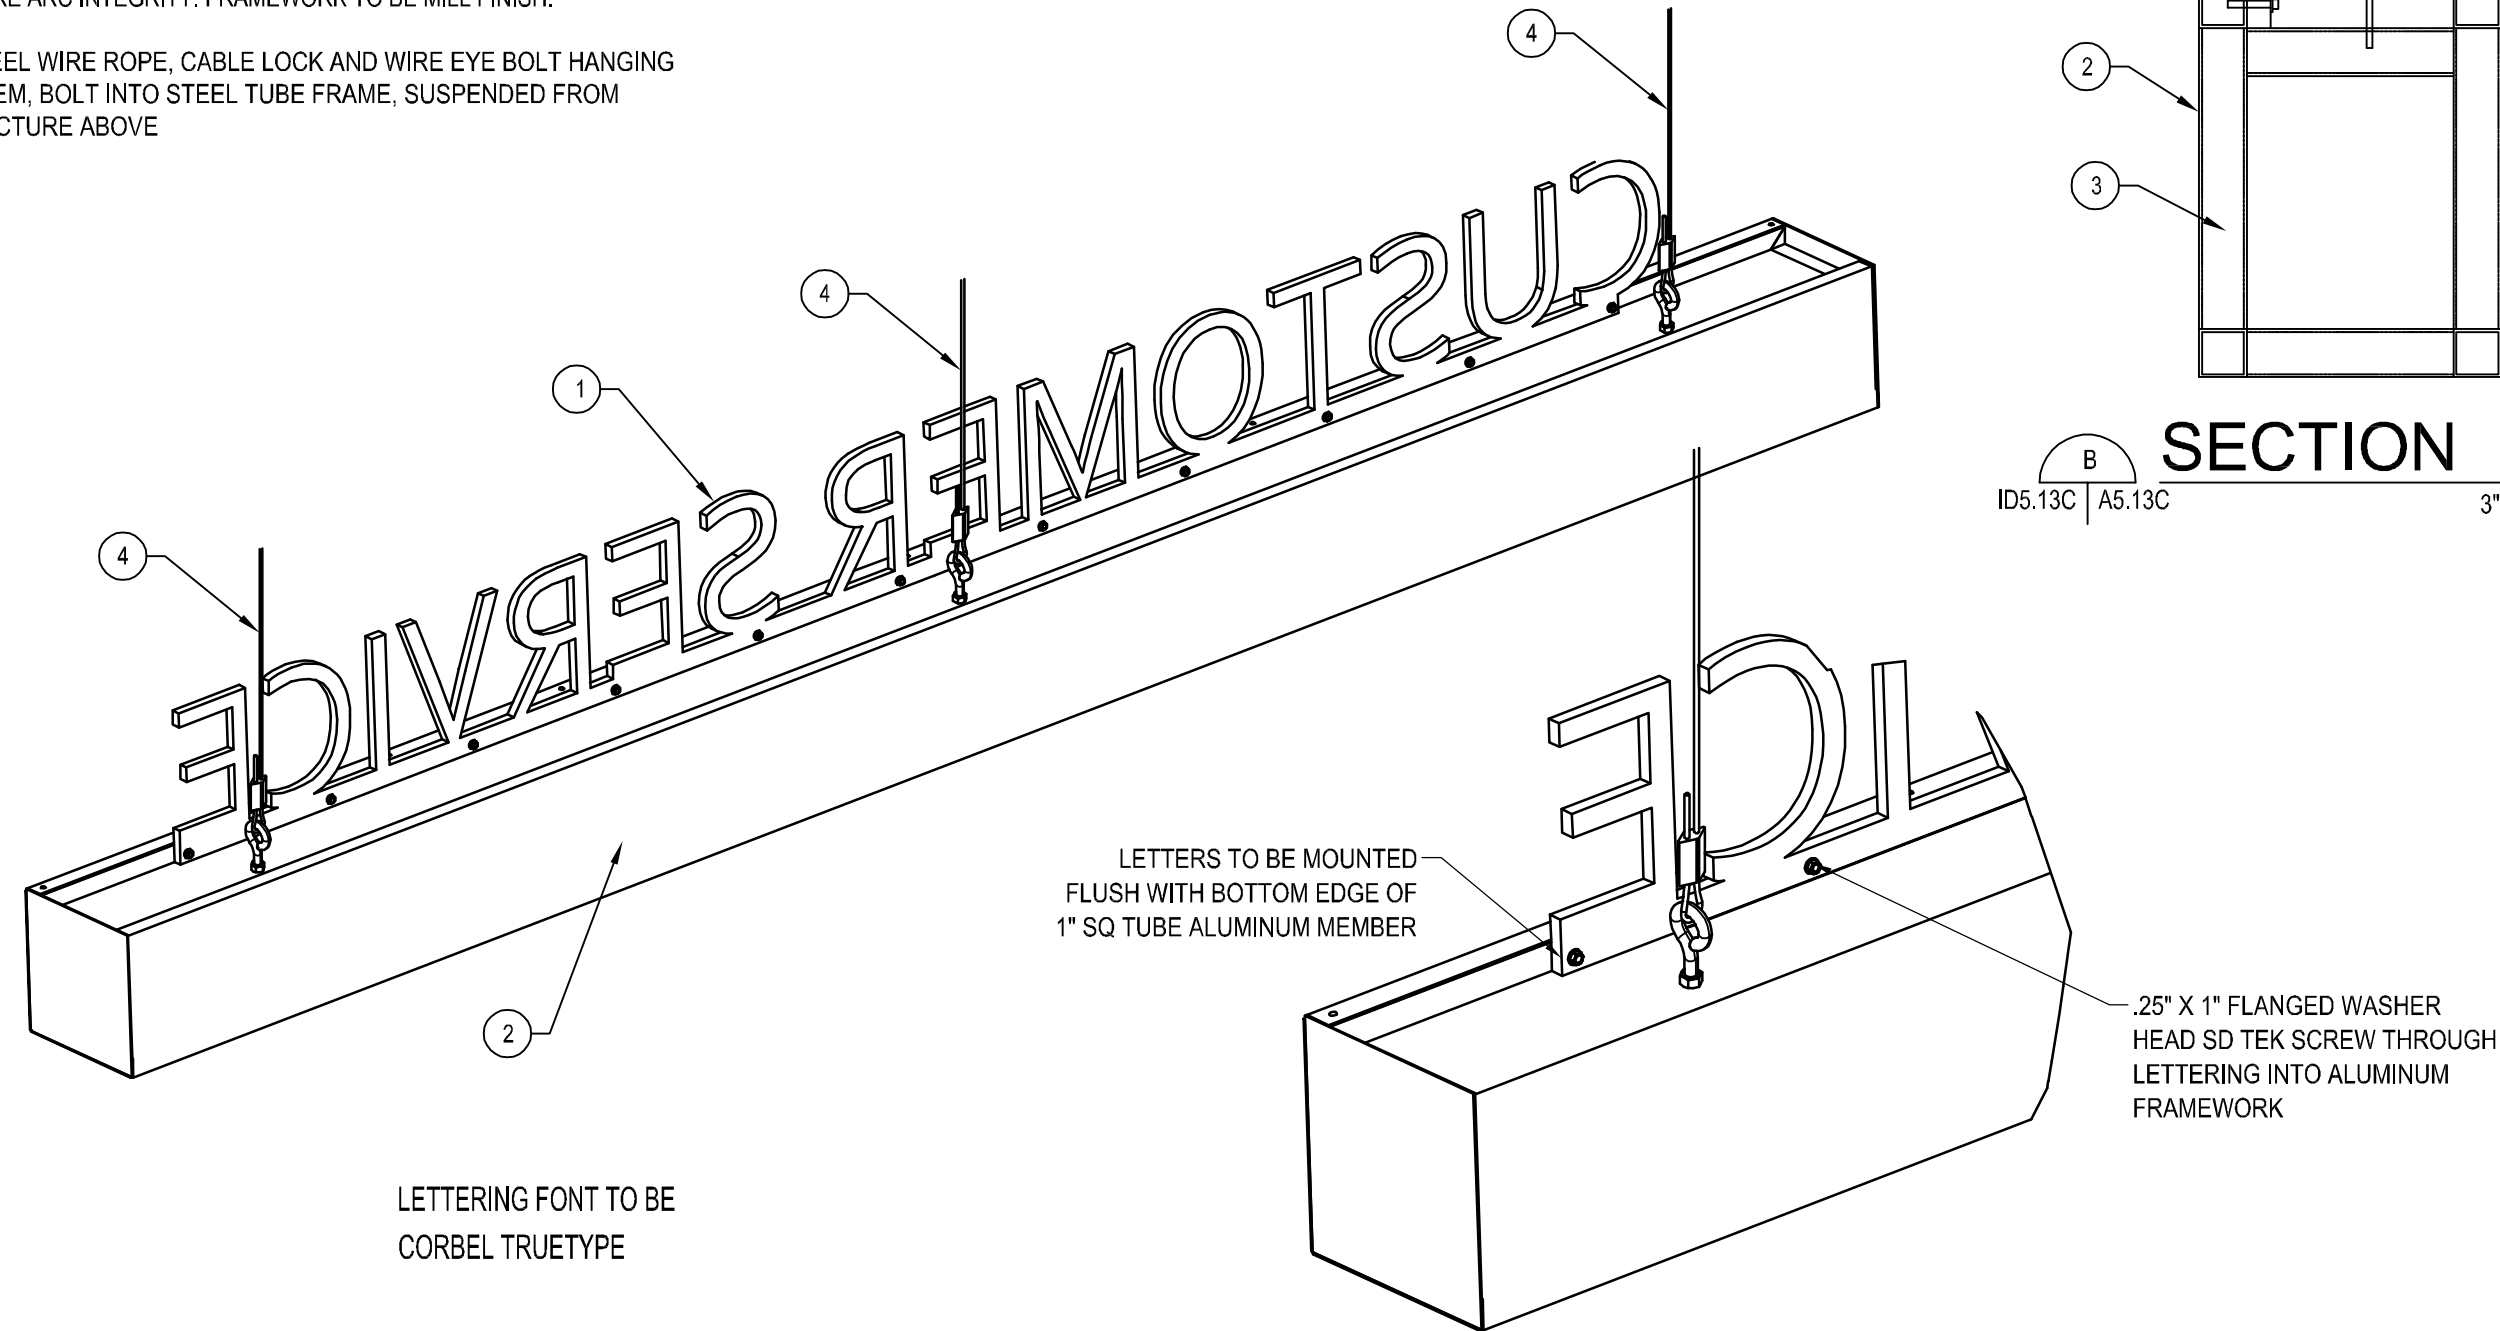

CUSTOMER SERVICE BOX ISOMETRICS

ID5.13A | A5.13C

1" = 1'-0"

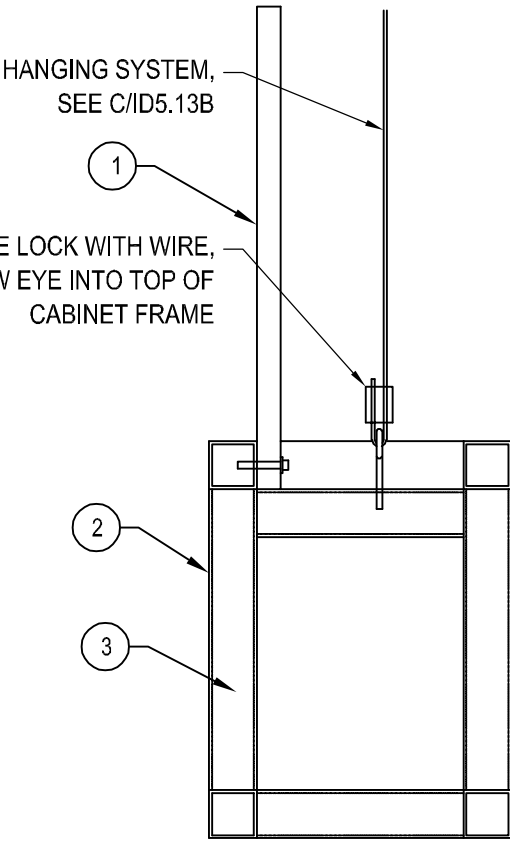

SECTION

ID5.13C | A5.13C 3" = 1'-0"

Customer Service Grid

Customer Service Lettering & Cabinet

DeCA  
Adaptive Uniform Decor Package

Defense Commissary Agency  
Lackland AFB, Texas  
Fort Lee, Virginia



ID5.13C