



1B20-B (Current as of DEC 2010)

BPW2E
Double Wide Proof Box

STANDARD FEATURES

- Patented air flow system
- Easy access heat and humidity system
 - Internally mounted
 - No flushing required
- Eye-level digital control panel
 - Set heat/humidity system
 - Four independent timers
- Stainless steel interior and exterior
- Modular panel construction with cam lock attachment
- Field assembled – shipped knocked down
- Open floor – no ramp required

OPTIONS & ACCESSORIES

- Low profile, 94" overall height
- 99.5" overall height to match rack oven
- Pass-Thru
- Stainless steel floor – no ramp required
- Windows in doors
- Interior light
- Upper side trim – 1 or 2 sides
- Prison package

MODEL CONFIGURATIONS

- 40.5"D** – May be shipped assembled
 - Two Single End or Three Side Load Racks or One Double Rack
- 60.5"D**
 - Four Single End or Side Load Racks or Two Double Racks
- 80.5"D**
 - Five Single End or Six Side Load Racks or Two Double Racks
- 100.5"D**
 - Six Single End or Eight Side Load Racks or Three Double Racks
- 120.5"D**
 - Eight Single End or Ten Side Load Racks or Three Double Racks



Area Reserved For Consultant & Contractor Approvals



19220 State Route 162 East
Orting, WA 98360
www.baxterbakery.com


Factory
(360) 893-5554

Customer Care
(800) 777-2828
or
(800) 462-2778

Customer Care Fax
(937) 332-2852



BPW2E Double Wide Proof Box

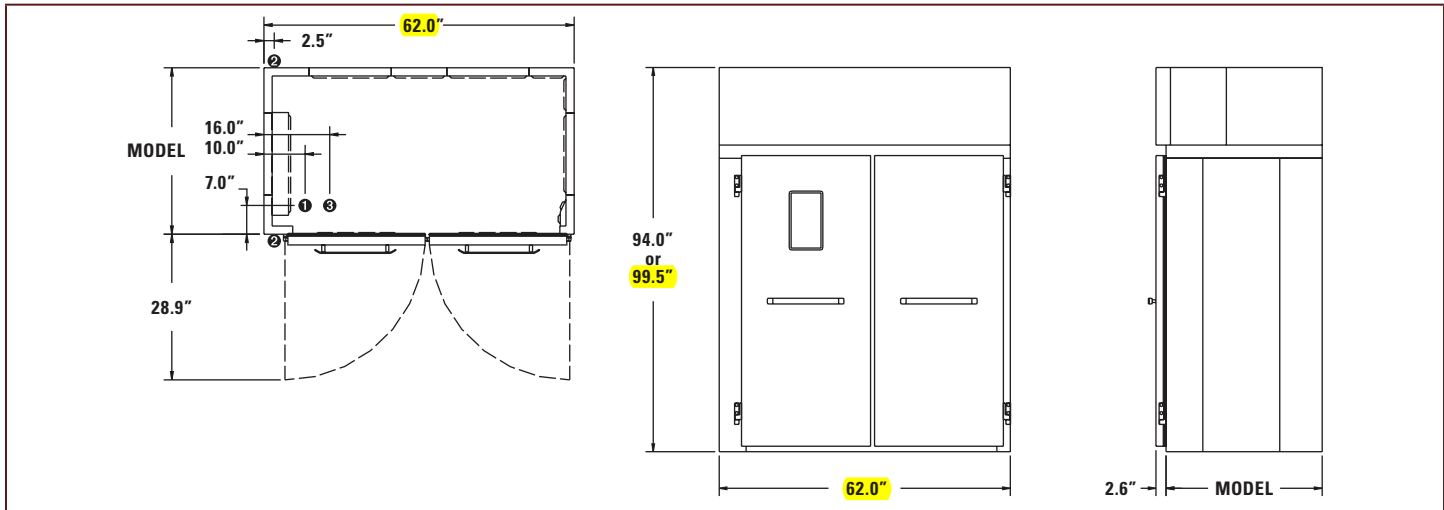

• 74" max. Rack Height • Freight Class: 85

Physical Data	Model 40.5"D	Model 60.5"D	Model 80.5"D	Model 100.5" D	Model 120.5"D
Interior Dimensions	37.8"D x 52.6"W x 74.5"H 95.9cm x 133.6cm x 189.2cm	57.8"D x 52.6"W x 74.5"H 146.7cm x 133.6cm x 189.2cm	77.8"D x 52.6"W x 74.5"H 197.5cm x 133.6cm x 189.2cm	97.8"D x 52.6"W x 74.5"H 248.3cm x 133.6cm x 189.2cm	117.8"D x 52.6"W x 74.5"H 299.1cm x 133.6cm x 189.2cm
Exterior Dimensions	43.3"D x 62.0"W 109.9cm x 157.5cm	63.3"D x 62.0"W 160.7cm x 157.5cm	83.3"D x 62.0"W 211.5cm x 157.5cm	103.3"D x 62.0"W 262.4cm x 157.5cm	123.3"D x 62.0"W 313.1cm x 157.5cm
Net Door Opening Height	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm
Net Door Opening Width	51.0" / 129.5cm	51.0" / 129.5cm	51.0" / 129.5cm	51.0" / 129.5cm	51.0" / 129.5cm
Power Input with Neutral ^A	208-240V/1/18.4-20.4A or 208-240V/3/18.4-20.4A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/3/35.5-39.5A
KD Shipping Info (crate dims. & approx. wgt.)	91.5"D x 36.5"W x 65.5"H 1,310 lbs. ^B	91.5"D x 36.5"W x 65.5"H 1,700 lbs.	91.5"D x 36.5"W x 65.5"H 1,900 lbs.	127.5"D x 44.5"W x 65.5"H 2,050 lbs.	127.5"D x 44.5"W x 65.5"H 2,250 lbs.

UTILITIES & NOTES

- ❶ **Water:** ½" FNPT cold water 30-80 psi at 85" (215.9 cm) AFF.
NOTE: Water supply must have the proper hardness, pH & chloride concentration. Consult your local water company and/or water conditioner dealer before installation.
 - **Recommended water hardness range:** 2-4 grains per gallon.
 - **Recommended pH range:** 7.0 to 8.0.
 - **Acceptable range for chloride concentration:** 0-30 ppm.
 - ❷ **Drain:** ½" FNPT, front or rear drain at 5" (12.7 cm) AFF. Rte to air-gap drain.
 - ❸ **Power:** Provide connection(s) at 85" (215.9 cm) AFF. See chart above for specific information.
 - ^A Neutral wire circuitry needed to provide 110-120V for control components. A separate line may be run or a transformer will be required if 110-120V is not available.
- Installation:** Floor should be level within ¼" per foot for proper installation. Slope should not exceed ¾" in all directions under the unit.
- ❹ **Shipping:** "Where available, contact factory for shipping assembled shipping information."

SHORT SPECIFICATION

The proofer shall be of stainless steel construction, manufactured in the United States by Baxter Mfg. The unit footprint shall be no wider than 62.0" and have two height options to meet the needs of the site and the project. Built using modular panel construction with cam lock attachment, the proofer shall incorporate foam insulation and gaskets to form a strong, energy efficient enclosure. Nonmetallic Interior bumpers shall protect the interior on all sides.

The proofer shall include eye level, digital controls in the door and a patented air flow system. No ramp is required for this unit. The controls will independently set temperature and humidity for precise proofing control. Four individual count-down timers for products with different time requirements shall be provided. The air flow system will include an internally mounted humidifier. No flush cleaning is required. The door shall be hinged so as not to require a center jamb: giving maximum access to the proofer interior.

The proofer will bear the following agency approvals: UL for safety and sanitation and city of Los Angeles.

Manufacturer reserves the right to make changes in sizes and specifications.



19220 State Route 162 East
Orting, WA 98360
www.baxterbakery.com

Factory
(360) 893-5554

Customer Care
(800) 777-2828
or
(800) 462-2778

Customer Care Fax
(937) 332-2852