

HUSSMANN®

HGM-3BS

Vertical Glass Door Merchandisers




HGM-BS Optional
Lighted Sign



Self-Contained and Remote HGM Vertical Glass Door Merchandisers

HUSSMANN®

HGM-1BS, HGM-2BS, HGM-3BS Bottom Mount Medium Temperature for Dairy, Deli and Beverages

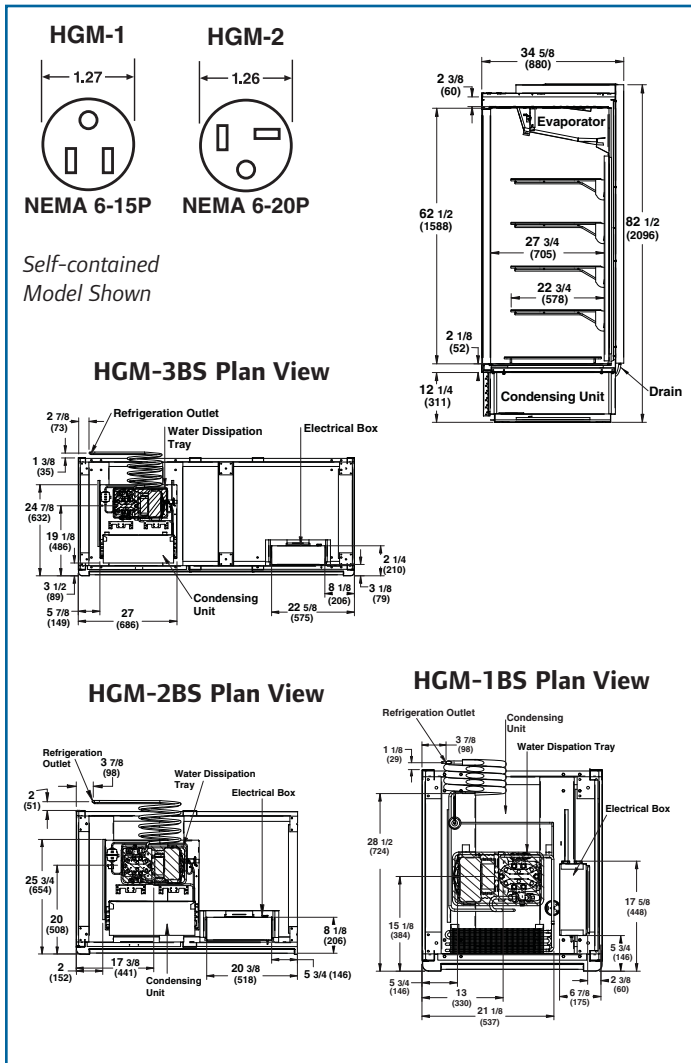

Standard Features

- Contemporary styling places maximum attention on merchandising. All HGM merchandisers have the same access panel design for commonality between merchandisers.
- LED lights
- White powder coated exterior and interior finish.
- CFC-Free foamed-in-place urethane insulation.
- Doors can be locked open for stocking.
- Each door section includes four adjustable cantilever-type shelves and a bottom rack. All shelves and racks have a white epoxy coated finish. Shelves may be slanted for special displays and are interchangeable in all models.
- Full use of the shelf upright posts is available for positioning the shelves. Shelf bracket profiles have been slimmed down to better facilitate product merchandising under and across the shelves.
- The HGM-1BS and HGM-2BS are equipped with 115 volt power cord (see diagram). The HGM-3BS requires field wiring to 115 volt service.
- Easy-to-read digital solar powered thermometer. Electronic temperature control ensures consistent product temperature.

Matching Low Temperature Models

For a matching side-by-side display of frozen foods and ice cream, be sure to see the companion HGL-BS series of low temperature 1-, 2- and 3-door models.

Warranty

For detailed warranty information, visit www.hussmann.com.

Optional Accessories

- Variety of Exterior Colors
- Three Tier Step Rack
- Price Tag Moulding
- Baskets
- Shelf Product Stops
- Additional Display Shelves
- Door Guard
- Door Lock
- Peg Bar and Hooks
- End Windows
- Lighted Sign
- Leveler Kit
- Can Dispensing Rack
- Caster Kit

Model	Refrigeration load (BTU/h)	A/C load (BTU/h)	Energy Consumpt. (kWh/day)
HGM-1BS	1870	2575	5.46
HGM-1B		-	-
HGM-2BS	2300	3165	8.96
HGM-2B		-	-
HGM-3BS	4270	5875	9.84
HGM-3B		-	-



Model	Exterior Dimensions			Nominal H.P.	Refrig.	Electrical					Approx. Ship Wt. (LBS)
	L	D*	H			Hz/Ph	Volts	Run Amps	Fuse Amps	NEMA Plug	
HGM-1BS	28 7/8"	34 5/8"	82 1/2"	1/3	R-134a	60/1	115	11.8	15	5-15P	593
HGM-1B	28 7/8"	34 5/8"	82 1/2"	-	R-134a	60/1	115	5.3	15	hardwired	520
HGM-2BS	52"	34 5/8"	82 1/2"	1/2	R-134a	60/1	115	12.5	20	5-20P	825
HGM-2B	52"	34 5/8"	82 1/2"	-	R-134a	60/1	115	6.0	15	hardwired	730
HGM-3BS	75 3/8"	34 5/8"	82 1/2"	3/4	R-134a	60/1	115	20.5	30	hardwired	1096
HGM-3B	75 3/8"	34 5/8"	82 1/2"	-	R-134a	60/1	115	8.0	15	hardwired	991

*Exclusive of door handles. Optional lighted sign increases overall height to 83 9/16".

NOTE: For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Web Site: www.hussmann.com

